


R771

LEDE

Recessed Fixed Downlight Kit LEDE Economy Select 3K/4K

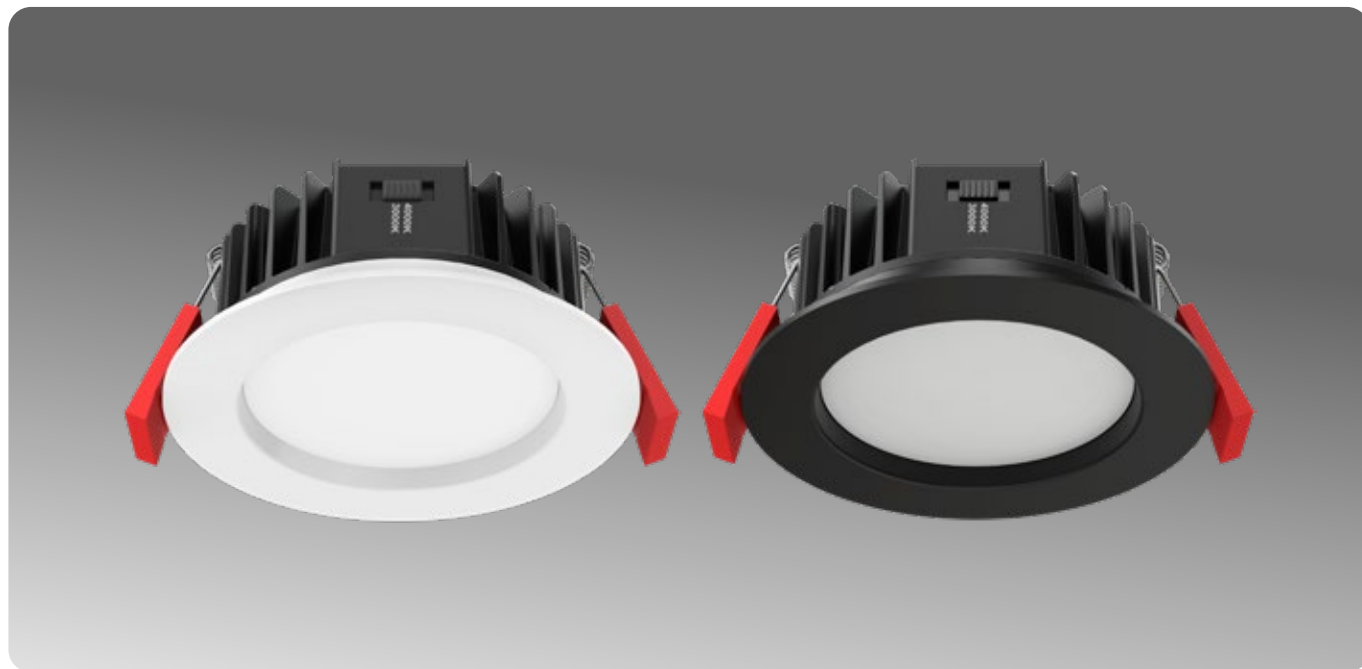

SPECIFICATIONS

DIMENSIONS	D103 x H43mm
CUT OUT	Ø 92mm
COLOUR TEMP	Selectable 3000K Warm White or 4000K Natural White
LUMENS	White: 3000K Warm White 850lm 4000K Natural White 950lm Black: 3000K Warm White 800lm 4000K Natural White 850lm
CRI	90
LIFESPAN	55,000 hours (L80 B20)
BEAM ANGLE	90°
MATERIAL	Aluminium, ADC12, PBT, PC
IP RATING	IP44
CLEARANCE	25mm recommended for optimum lifespan. 0mm required. Rear of fitting may abut structural members and building elements.
CLASSIFICATION	IC-F Rated
DRIVER	DX Series Under Insulation Dimmable TRIAC Driver Included (pre-wired) 180mA
APPLICATION	Residential / Commercial Interior
WARRANTY	5 Year Warranty

<950
LUMENS

8
WATTS

AC
240V



UID™ Dimmable Under
Insulation Driver Included

AVAILABLE IN

select CCT

DESCRIPTION	CODE
Black 3000K/4000K "Select" Dual Colour	R771 B34V3
White 3000K/4000K "Select" Dual Colour	R771 W34V3
White 3000K/4000K "Select" Dual Colour, 10 pack	R771 W3410V3

Low glare R661 LEDE Luxe version available

CASAMBI

DESCRIPTION	CODE
White, 2700K-6500K Tunable White, Casambi	R771 WCCTCAS
Black, 2700K-6500K Tunable White, Casambi	R771 BCCTCAS
White, 3000K/4000K "Select" Dual Colour, Casambi	R771 W34V3CAS
Black, 3000K/4000K "Select" Dual Colour, Casambi	R771 B34V3CAS