GSP215/6 LOLA II

IP65 BEAM ANGLE ADJUSTABLE SPOTLIGHT

GSP215

GSP216

IP65 IK07 3 YEARS WARRANTY

FEATURES

- Die-cast aluminium body
- Powder coated marina paint in black
- Tempered glass cover
- Built in constant current LED driver
- Power factor: 0.9
- CREE COB LED chips
- LED lifespan: 50000 hours @ L70, Ta 25°
- Ta: -25°C to +45°C

OPTIONS

- 4000K COLOUR TEMPERATURE
- RGB
- HONEYCOMB
- SPIKE



PHOTOMETRIC DATA

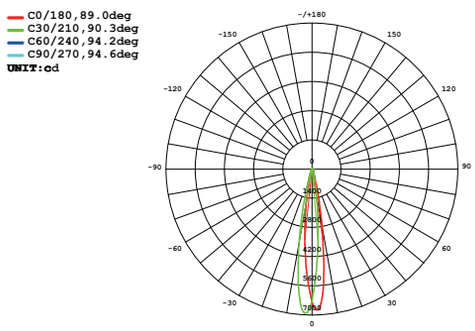

GSP215 WW 15°

DIMENSIONS

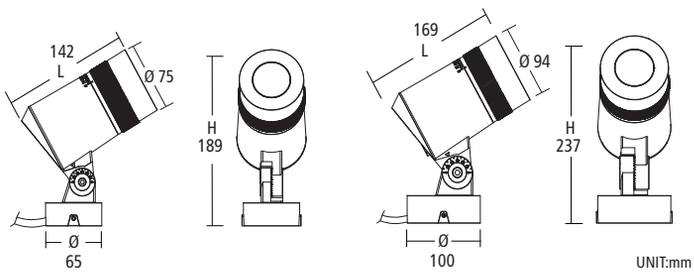

UNIT:mm

GSP215

GSP216

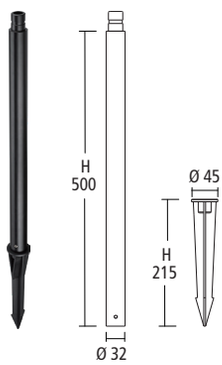

GSP215/SPIKE
(Order Separately)

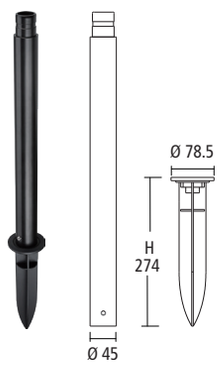

GSP216/SPIKE
(Order Separately)

Unit: mm

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (ADJUSTABLE) (°)	FITTING COLOUR	CARTON QUANTITY
GSP215 WW BK	230	15	1500	3000	>80	10-60	Black	8
GSP216 WW BK	230	20	2000	3000	>80	10-60	Black	4

Specifications above are for reference only and may vary without prior notice